
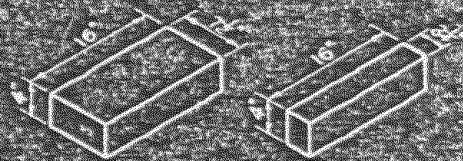
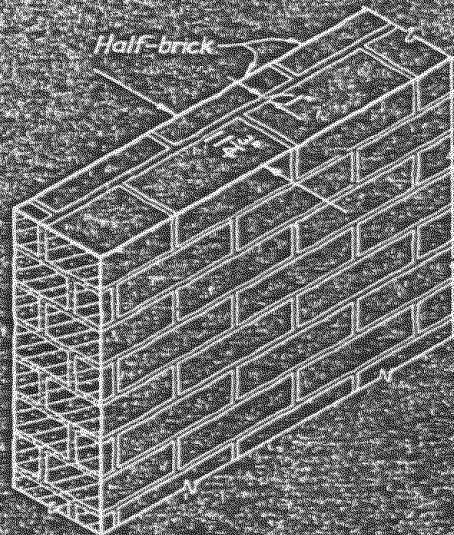
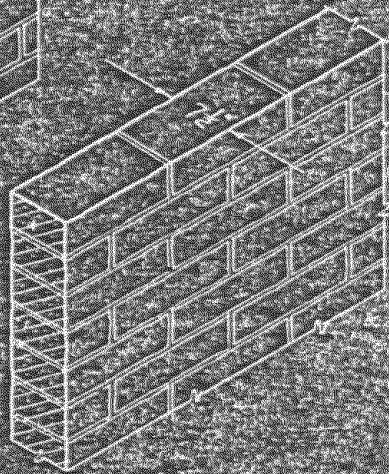


# STANDARD SHAPES AND WALLS

MORTAR: 1 to 2½ by volume of cement and well graded sand, waterproofed with 1½ gallons of Hydropal Emulsified Asphalt per sack of cement. Joints are ⅜" min. thick unless otherwise shown.

A 24" WALL may also be constructed with the standard brick.

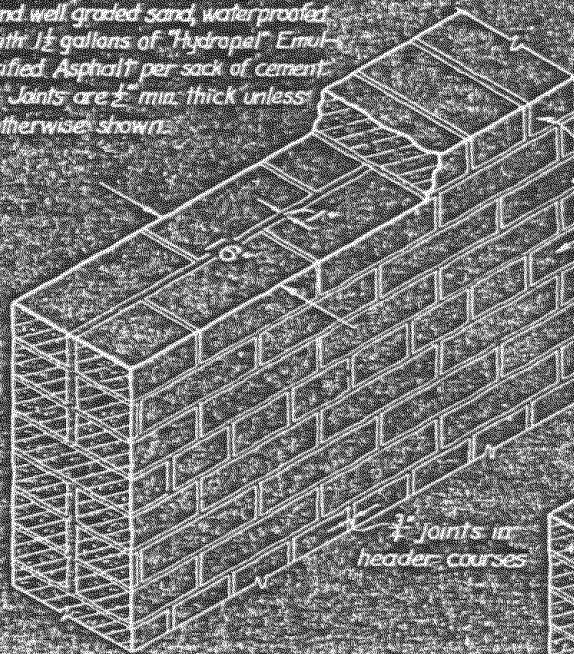

CALADOBRE BRICK

STANDARD SHAPES AND WALLS

DATA SHEET

DRAWN BY J.A.B. DATE OCT. 1943

No. 101